


NEW AUSTRALIAN / NEW ZEALAND STANDARD PLUG

Dear Client,

We would like to inform you that the new Australian / New Zealand Standard 3112-2000 has been published. A major change in the standard is the introduction of insulated plug pin. This new style of plug will be mandatory within 5 years after the publication of this standard, please find the picture below for the new style of plug.

INSULATED PINS

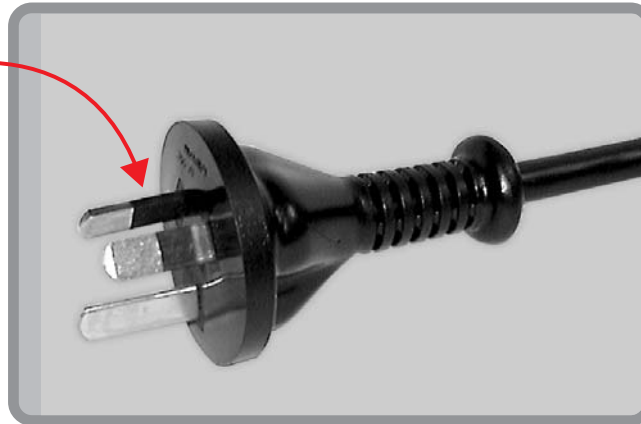

Using the insulated pins allows the deletion of the round boss requirements and allows non-circular plug shapes, the insulated pin plug shall be with all live pins in accordance with the Standard.

NOTE :

Both active and neutral pins are considered to be live.



CERTIFICATE

APPROVED MARK
STANDARDSMARK

Licence no. Connector : Lic 1023
Plug : Lic 1024
Cord : Lic 1025



STANDARD

AS/NZS 3112:2000, AS/NZS 3109.1,
AS/NZS 3191



APPLICATION

Heavy and Light Duty Household Appliance, Office Equipment, etc.



KP-552 (7.5A 250V)

***GTSA-3 0.75 mm²**



KS-31A (10A 250V)



KP-552 (10A 250V)

GTSA-3 1.0 mm²




KS-31A (10A 250V)



KP-562 (7.5A 250V)

LTSA-2F 0.75 mm²

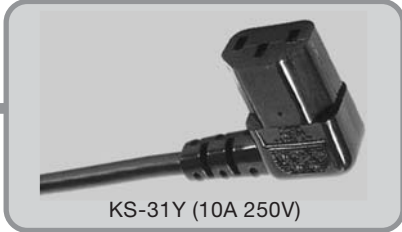

KS-31Y (10A 250V)



KP-552 (10A 250V)

**GTSA-3 0.75 mm²
GTSA-3 1.0 mm²**



KS-15F (2.5A 250V)



KP-562 (7.5A 250V)

**GTSA-2F 0.75 mm²
LTSA-2F 0.75 mm²**



KP-572 (15A 250V)

GTSA-3 1.5 mm²

* FLEXIBLE CORD LENGTH COULD BE LESS THAN 2m.

Should you have any more details, please feel free to contact us.

60/73 Moo 19 Navanakorn Industrial Estate Zone 3
Paholyothin Rd., Klong Nueng, Klong Luang
Pathumthani Province 12120 Thailand

Mr. Subin Pongpanmeesuk
TEL : 0-2529-1794-9, 0-2529-1800
FAX : 0-2529-1793, 0-2529-1801
E-Mail : subinp@kdk.fujikura.co.th